
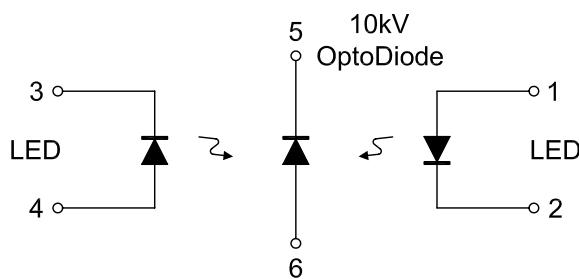


Opto Coupler

OC100HG

- High Current Gain
- High Isolation Voltage
- RoHS Compliant

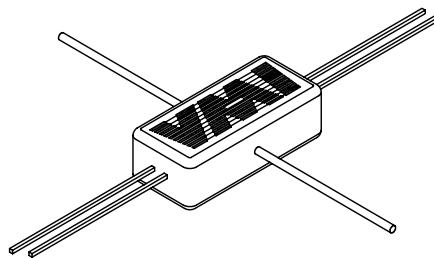





ABSOLUTE MAXIMUM RATINGS		ELECTRICAL CHARACTERISTICS	
LED		LED	
• Forward DC Current	100 mA	• Forward Voltage ($I_f = 20 \text{ mA}$)	1.5 V
• Surge Current	500 mA	• Reverse Leakage Current	100 nA
• Reverse Voltage	5 V	VR = 5 V	
• Power Dissipation (25°C)	190 mW		
Photodiode		Photodiode	
• Reverse Voltage	10,000 V	• Foward Voltage ($I_f = 0.6 \text{ A}$)	12.0 V MAX
• Power Dissipation	1.0 W	• Reverse Leakage Current	
		VR = 10 kV, $I_{LED} = 0 \text{ mA}$	250 nA Typical
		VR = 10 kV, $I_{LED} = 50 \text{ mA}$	230 μA Typical
• Storage Temperature	-40°C to +100°C	Coupled	
• Operating Temperature	-40°C to +70°C	• DC Current Transfer Ratio	0.38% MIN / 0.60% MAX
• Isolation Test Voltage	25 kV (From Pins 1, 2, 3 & 4 to Pins 5 & 6)	• T_{ON}	2 μs
		• T_{OFF}	2 μs
(25°C UNLESS OTHERWISE NOTED)			




VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

OC100HG

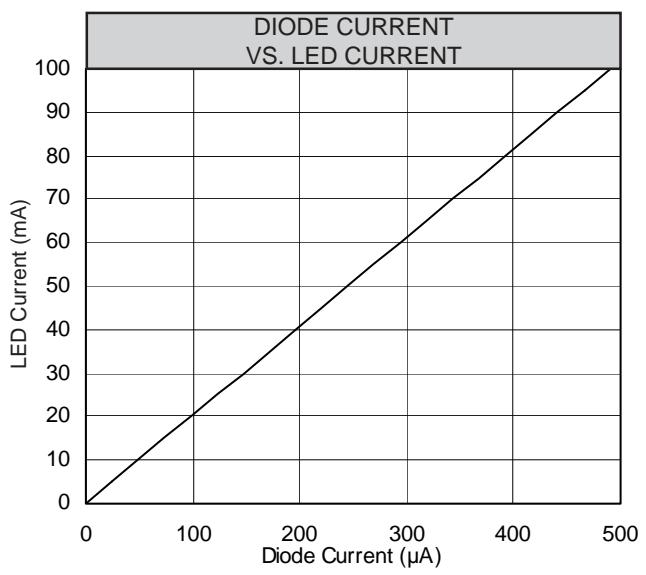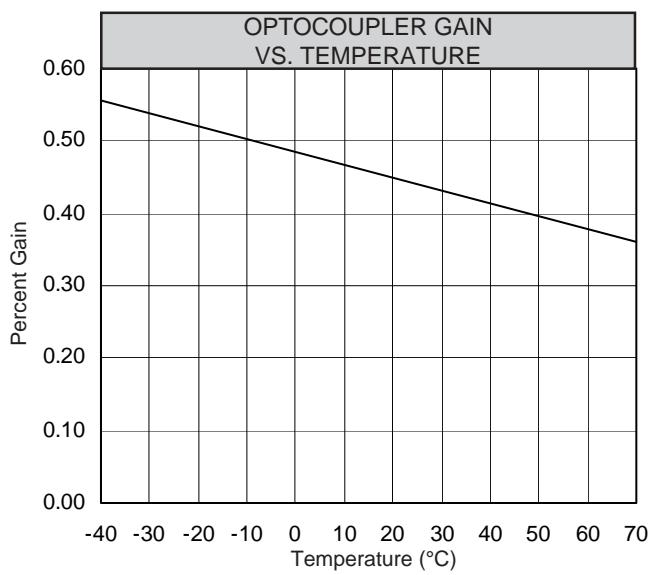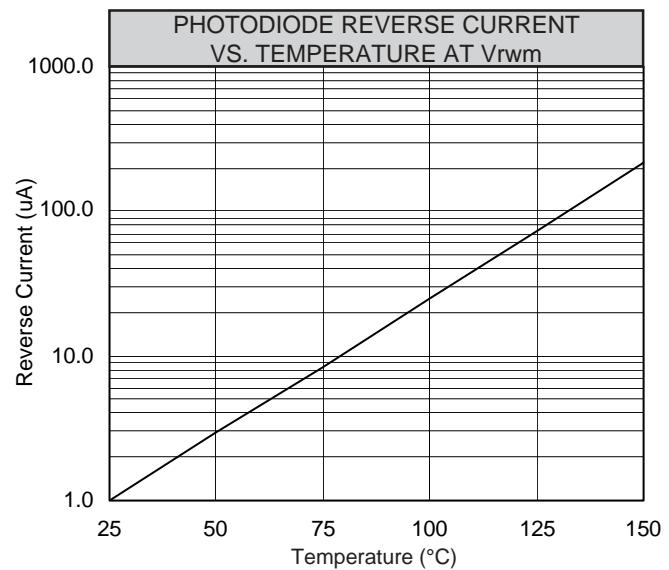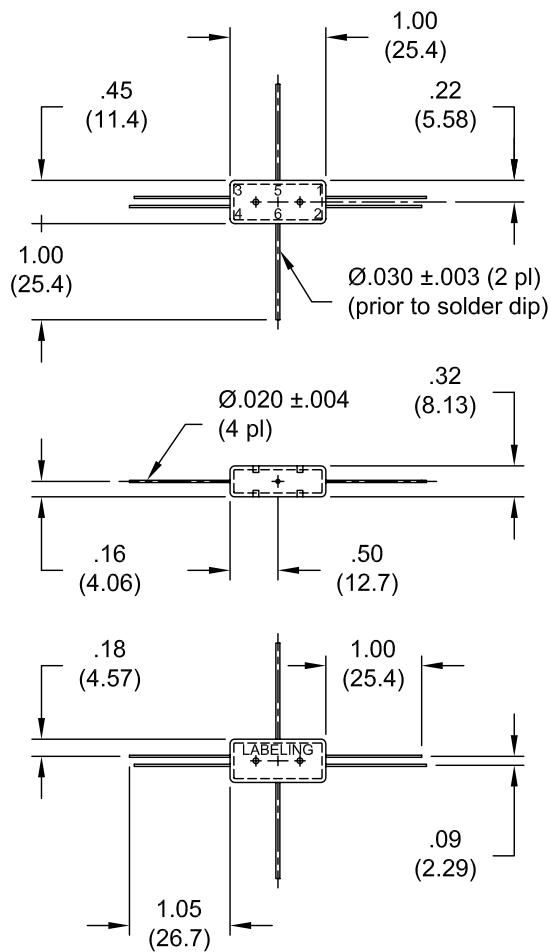

OC100HG

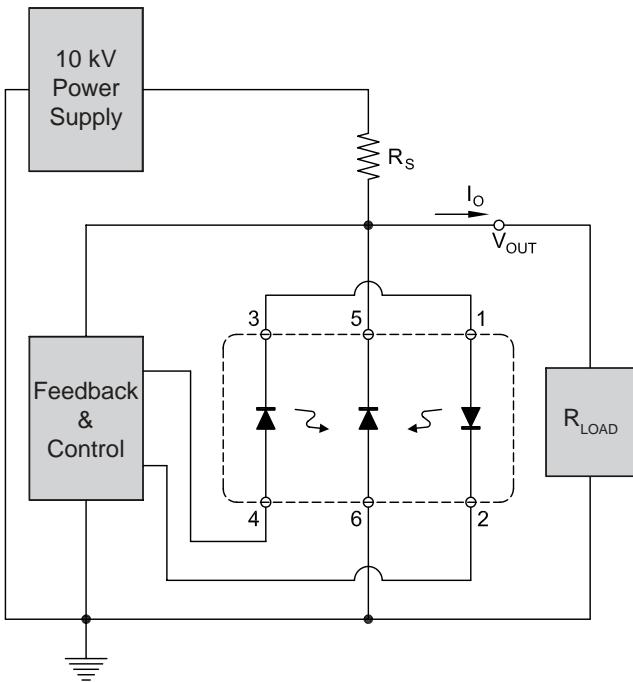

Typical HV Linear Regulator Circuit

- The two graphs below represent the relationship between output voltage and LED current with different values of R_s .
- Output voltage is found by the following formula:

$$V_{OUT} = V_{IN} - \{[I_{OUT} + (I_{LED} * \text{Gain})] * R_s\}$$
- Select resistor value to optimize circuit for V_{OUT} and I_{OUT} range.

